



MARUNAKA TEKKOSHO INC.

<https://marunaka-jp.com/>

Special tailor-made Bandsaw Concepts
for precise sizing/dimensioning (edging)

PIR/PUR Rigid Insulation Foam Blocks

Polyisocyanurate / Isocyanate Molecular Structure




Twin Bandsaw Line (infeed view)




Twin Bandsaw Line (outfeed view)

STORCH INDUSTRIE-ANLAGEN GmbH


<https://storch-ind.com/>

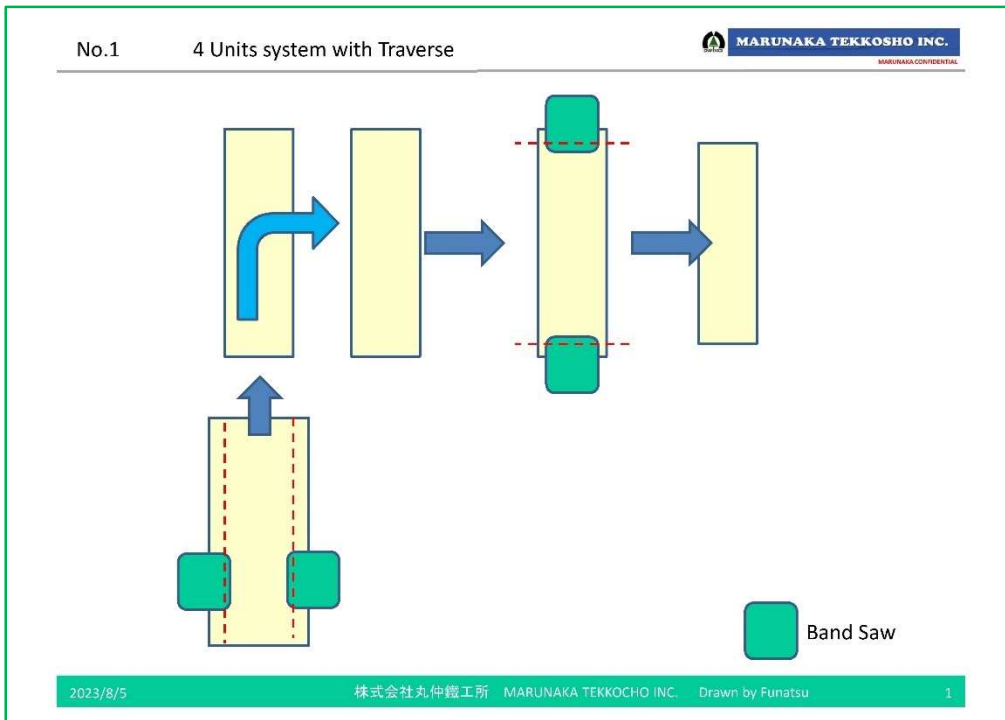


**No. 1 – Concept consisting of two (2) Twin Bandsaw sets
incl. Auto-Angular-Transfer Section**

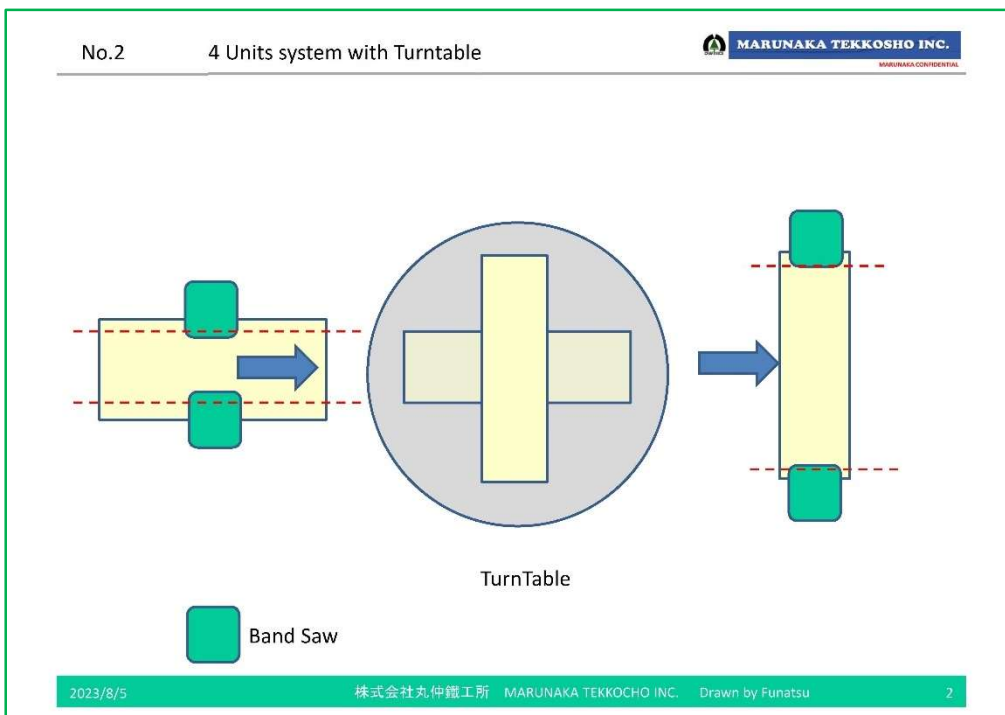

**No. 2 – Concept consisting of two (2) Twin Bandsaw sets
incl. Auto-Turn-Table Section**

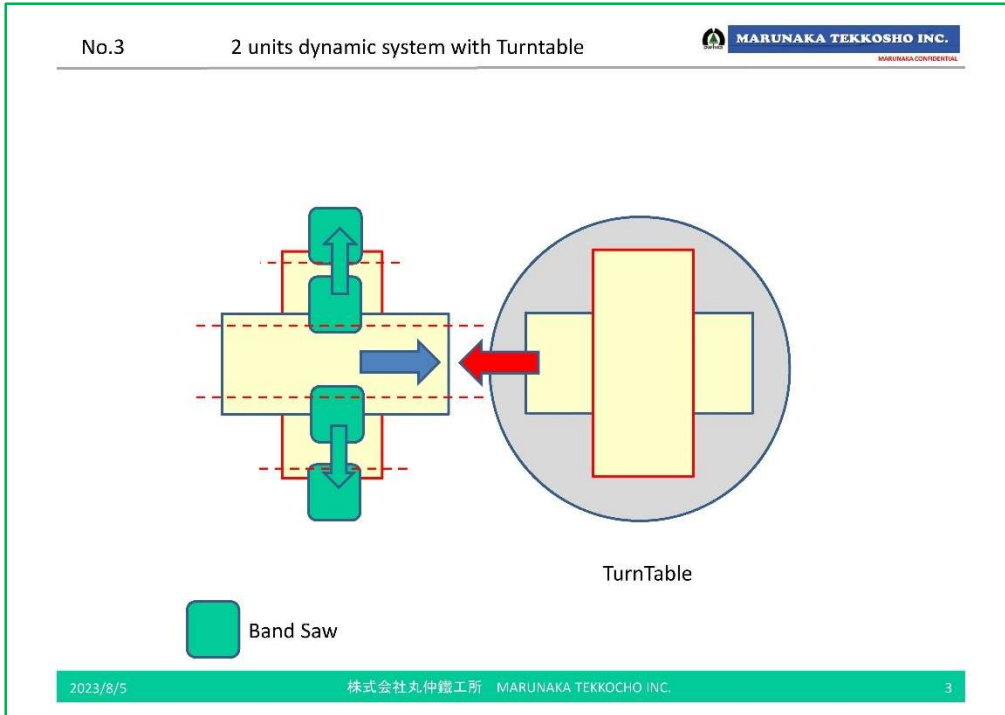

No. 3 – Concept consisting of one (1) Twin Bandsaw set incl. combined Auto-Turn-Table and Return Section

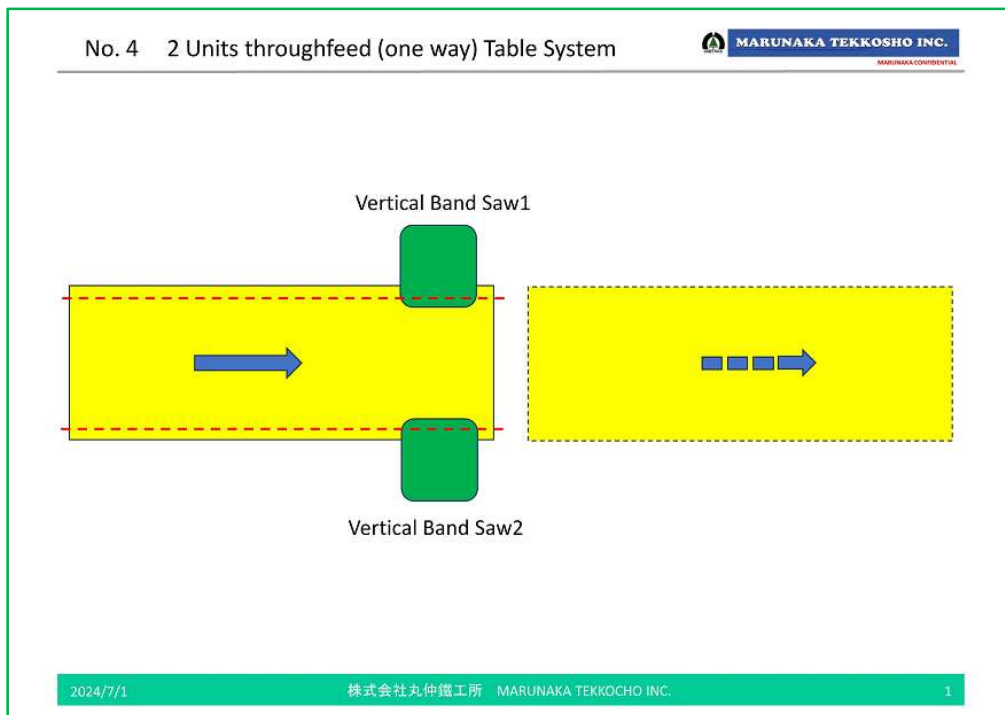

No. 3 – Concept consisting of one (1) Twin Bandsaw set incl. trough-feed (one way) Table System



MARUNAKA Special Bandsaw Type JB-M650UE

Main technical features of the bandsaw (only)	
Subject	Dimensions / Figures
Wheel dia.	650 mm
Bandsaw blade width	19 or 25 mm
Bandsaw blade length (max.)	5,150 mm
Main drive motor	3.7 kW
Bandsaw blade tension	0.2 kW
Cutting height (variable)	~ 600 – 1,000 mm
Weight net	~ 800 kg
Mechanization / Automation of the line (set)	tailor-made
E.&O.E. / Subject to alteration!	

Working width depends on your special requirements.

We welcome your enquiry or even your questions at any time.

You can rely on our competence.

Email addresses:

info@storch-ind.com

and

info@marunaka-jp.com

Made in Japan by MARUNAKA TEKKOSHO Inc.

STORCH INDUSTRIE-ANLAGEN GmbH

<https://storch-ind.com/>